


S1205 Technical Data

Double Sided Clear uPVC Film Rubber Tape



Product Composition

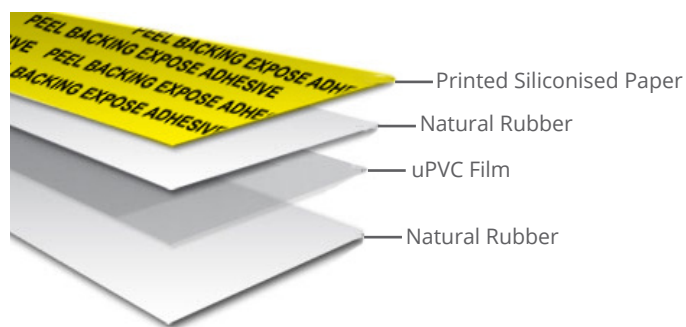

Liner	Printed Siliconised Paper
Adhesive Covered Side	Natural Rubber
Carrier	0.020mm uPVC Film
Adhesive Open Side	Natural Rubber

Benefits / Features	
Hand tearable	Good initial tack
High adhesion	Distinctive yellow release liner with the message "peel backing to expose adhesive"
Removes cleanly on most surfaces	

Areas of Use
Ideal for general bonding applications & print finishing. Excellent cohesion between film carrier and adhesive allows use in applications where clean removal is required.

Applicable Industries
Office, light manufacturing, Retail, Point of sales & Print industries

Product Features	Applicability On			
Initial adhesion	● ● ○	Foam	● ○ ○	
Final adhesion	● ● ○	Rubber	● ● ○	
Dimensional stability	● ● ●	Fabric	● ○ ○	
Adhesion on even surfaces	● ● ○	Glass/Ceramics	● ● ○	
Adhesion on rough surfaces	● ○ ○	Finished timber	● ● ○	
Ageing resistance	● ○ ○	High energy plastics: PVC, PC, ABS,..	● ● ●	
Weathering resistance	● ○ ○	Low energy plastics: PE, PP	● ○ ○	
Chemical resistance	● ○ ○	Metal	● ● ○	
Resistance to plasticizers	○ ○ ○	Paper/Cardboard	● ● ●	
● ● ● Very suitable ● ● ○ Suitable ● ○ ○ Suitable with reductions ○ ○ ○ Not suitable				

Temperature Range (°C)	-10 to +65
Static Shear Strength	>140 Hours
Adhesion to Stainless Steel (N/25mm)	12
Thickness (mm)	0.090 (90 Microns)
Standard Sizes Available	12mm x 33m = 72 Rolls Per Carton 18mm x 33m = 48 Rolls Per Carton 24mm x 33m = 36 Rolls Per Carton 48mm x 33m = 24 Rolls Per Carton
	Can be slit to custom sizes & widths, 100m rolls available

The figures above are based off average results from multiple tests, results may vary + or - 5%

Conditions of Use

For best results apply self adhesive tapes between 15°C and 25°C in a dry environment. Application surfaces must be dry and free from dust and particles. Do not apply on surfaces treated or contaminated by anti-adhesives. Do not use paint containing additives which could reduce the adhesive properties. Avoid contact with surfaces containing plasticizers or other chemical agents not compatible with the tape. In cases of rough or irregular surfaces, it is better to use a tape with a higher quantity of adhesive. Care must be taken with reference to removability without residue and working conditions of the self adhesive tape.

Tape Storage

Ideally store tape between 15°C and 25°C with a maximum relative humidity of 65%. Always store away from heat sources, avoiding exposure to light and if possible keep in the original packaging. When temperatures are lower than 15°C it is highly recommended to recondition the adhesive tape to normal temperatures (15°C to 25°C) before use.

Tape Shelf Life

Self-adhesive tapes technical features are generally not permanent but remain at their best for approximately 12 months, if stored according to suggested conditions and by avoiding extreme environmental conditions such as quick and sudden temperature changes, exposure to UV light and high levels of humidity.

All test methods are based on ASTM standards and Pomona's standardised test methods. The information provided above is based on our experience and tape industry knowledge. It is given in good will but is not intended as a guarantee or a warranty. All end users should ensure for themselves that the product is suitable for their own particular application before using.