


Super Fine Edge 28+ Day Masking Tape

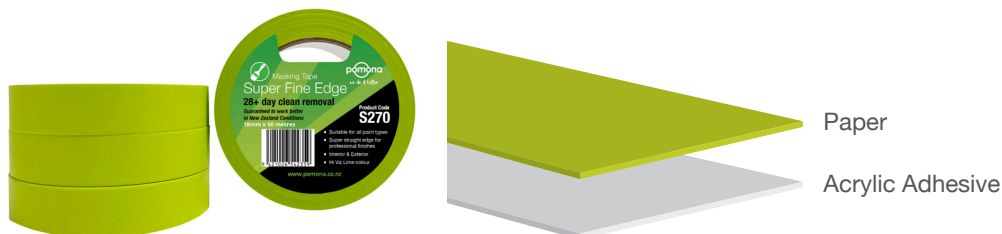

PRODUCT COMPOSITION

SPECIFICATIONS	
Code	S270
Description	70g/m2 Yellow Saturated Crepe Paper with Natural Rubber Adhesive
Features and Benefits	28+ days UV clean removal interior/exterior Razor sharp edge for professional finishes All paint types Hi Viz lime green colour Tested and guaranteed to work better in New Zealand conditions
Areas of Use	Decorating & Masking applications Residential & Commercial painting - interior/exterior Marine painting
Industries	Decorative Trade
Colour	Lime Green
Sizes Available	18mm x 50m (32 Rolls / Carton) 24mm x 50m (24 Rolls / Carton) 36mm x 50m (16 Rolls / Carton) 48mm x 50m (12 Rolls / Carton)
Slitting Options	Custom slit available on request

PHYSICAL PROPERTIES	
Backing (Liner)	Rice paper
Adhesive Type	Acrylic
Maximum Tensile (N/25mm)	70
Elongation at Break (%)	4
Outdoor Use	28+ days
Adhesion to Stainless Steel (N/25mm)	2.9
Temperature Rating	90
Total Thickness (microns)	110

The figures above are based off average results from multiple tests, results may vary + or - 5%

100% New Zealand Owned & Operated

CONDITIONS OF USE

For best results apply self-adhesive labelopes between 15°C and 25°C in a dry environment. Application surfaces must be dry and free from dust and particles. Do not apply on surfaces treated or contaminated by anti-adhesives. Avoid contact with surfaces containing plasticizers or other chemical agents not compatible with the tape. Care must be taken regarding removability without residue and working conditions of the self-adhesive labelopes.

TAPE STORAGE

Ideally, store labelopes between 15°C and 25°C with a maximum relative humidity of 65%. Always store away from heat sources, avoiding exposure to light and if possible keep in the original packaging. When temperatures are lower than 15°C, it is highly recommended to recondition the adhesive labelope to the average temperature range (15°C to 25°C) before use.

TAPE SHELF LIFE

Self-adhesive labelopes technical features are generally not permanent but remain at their best for approximately 12 months, if stored according to suggested conditions and by avoiding extreme environmental conditions such as quick and sudden temperature changes, exposure to UV light and high levels of humidity.

OTHER INFORMATION

All test methods are based on ASTM standards and Pomona's standardised test methods. The information provided above is based on our experience and tape industry knowledge. It is given in goodwill but is not a guarantee or a warranty. All end-users should ensure for themselves that the product is suitable for their particular application before using.

NB: Peak Force Test: based on ASTM 3759/D ASTM 3759/M and Pomona® test methods,
Peel Test: based on ASTM D3330 and Pomona® test methods.

Pomona products are registered and under trademark of PGL and sold exclusively through selected distributors. For further information on Pomona please email sales@pglgroup.co.nz, phone 0800 766 662 or contact your distributor.