


S380 Technical Data



Green Exterior UV Resistant Cloth Masking Tape



Product Composition

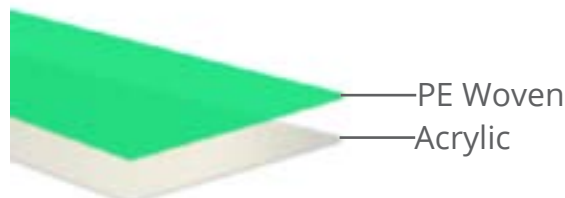

Colours



S380

Description	Green Exterior UV Resistant Cloth Masking Tape 60+ Days
Features/Benefits	60+ days clean removal Strong cloth backing Works on smooth surfaces including Glass UV Resistant
Areas of Use	Plastering Exterior masking applications
Applicable Industries	Plastering Commercial Painting
Standard Sizes Available	24mm x 30m = 36 Rolls Per Carton 36mm x 30m = 24 Rolls Per Carton 48mm x 30m = 24 Rolls Per Carton
Slitting Options	Custom slit available on request
Backing (Liner)	PE Woven
Adhesive Type	Acrylic
Maximum Tensile N/25mm	75
Elongation at Break %	72
Outdoor Use	60+ Days
Adhesion to Stainless Steel N/25mm	3.2
Total Thickness (mm)	0.155 (155 Microns)

The figures above are based off average results from multiple tests, results may vary + or - 5%

Pomona & Selfgard™ products are registered and under trademark of Pomona Group Ltd and sold exclusively through selected distributors.

For further information on Pomona or Selfgard™ please email sales@pomona.co.nz, phone 0800 POMONA (0800 766662) or contact your distributor.



100% NZ Owned and Operated

www.pomona.co.nz

Conditions of Use

For best results apply self adhesive tapes between 15°C and 25°C in a dry environment. Application surfaces must be dry and free from dust and particles. Do not apply on surfaces treated or contaminated by anti-adhesives. Do not use paint containing additives which could reduce the adhesive properties. Avoid contact with surfaces containing plasticizers or other chemical agents not compatible with the tape. In cases of rough or irregular surfaces, it is better to use a tape with a higher quantity of adhesive. Care must be taken with reference to removability without residue and working conditions of the self adhesive tape.

Tape Storage

Ideally store tape between 15°C and 25°C with a maximum relative humidity of 65%. Always store away from heat sources, avoiding exposure to light and if possible keep in the original packaging. When temperatures are lower than 15°C it is highly recommended to recondition the adhesive tape to normal temperatures (15°C to 25°C) before use.

Tape Shelf Life

Self-adhesive tapes technical features are generally not permanent but remain at their best for approximately 12 months, if stored according to suggested conditions and by avoiding extreme environmental conditions such as quick and sudden temperature changes, exposure to UV light and high levels of humidity.

All test methods are based on ASTM standards and Pomona's standardised test methods. The information provided above is based on our experience and tape industry knowledge. It is given in good will but is not intended as a guarantee or a warranty. All end users should ensure for themselves that the product is suitable for their own particular application before using. NB: Peak Force Test: based on ASTM 3759/D ASTM 3759/M and Pomona® test methods, Peel Test: based on ASTM D3330 and Pomona® test methods.