


S402 Technical Data

Double Sided Tissue Rubber Tape



Product Composition

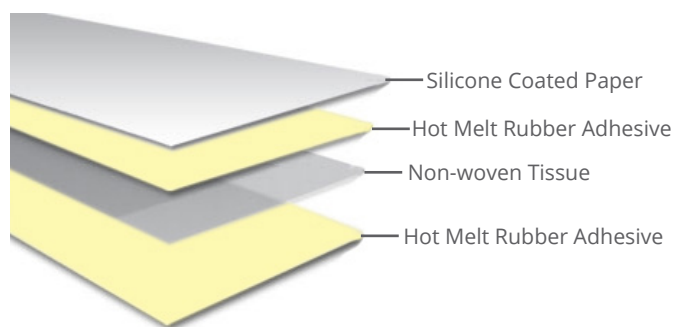

Liner	White Silicone Coated Paper
Adhesive Covered Side	Honey Coloured Hot Melt Rubber Adhesive
Carrier	Nonwoven Tissue
Adhesive Open Side	Honey Coloured Hot Melt Rubber Adhesive

Benefits / Features

Excellent initial tack
Economical

Sticks to rough surfaces

Areas of Use

Ideal for any economical general internal fixing applications on paper, cardboard & plastic or where high temperature resistance is not important.

Applicable Industries

DIY, Craft & Manufacturing industries

Product Features		Applicability On	
Initial adhesion	● ● ●	Foam	● ● ●
Final adhesion	● ● ○	Rubber	● ● ●
Dimensional stability	● ○ ○	Fabric	● ● ○
Adhesion on even surfaces	● ● ●	Glass/Ceramics	● ● ●
Adhesion on rough surfaces	● ● ●	Finished Timber	● ● ●
Ageing resistance	● ○ ○	High energy plastics: PVC, PC, ABS,..	● ● ●
Weathering Resistance	● ○ ○	Low energy plastics: PE, PP	● ○ ○
Chemical resistance	● ○ ○	Metal	● ● ●
Resistance to plasticizers	○ ○ ○	Paper/Cardboard	● ● ●
● ● ● Very suitable ● ● ○ Suitable ● ○ ○ Suitable with reductions ○ ○ ○ Not suitable			

Temperature Range (°C)	-20 to +60
Static Shear Strength	> 12 Hours
Adhesion to Stainless Steel (N/25mm)	27.5
Thickness (mm)	0.150 (150 Microns)
Standard Sizes Available	12mm x 50m = 72 Rolls Per Carton 24mm x 50m = 36 Rolls Per Carton 36mm x 50m = 24 Rolls Per Carton 48mm x 50m = 24 Rolls Per Carton Custom sizes available on request

The figures above are based off average results from multiple tests, results may vary + or - 5%

Conditions of Use

For best results apply self adhesive tapes between 15°C and 25°C in a dry environment. Application surfaces must be dry and free from dust and particles. Do not apply on surfaces treated or contaminated by anti-adhesives. Do not use paint containing additives which could reduce the adhesive properties. Avoid contact with surfaces containing plasticizers or other chemical agents not compatible with the tape. In cases of rough or irregular surfaces, it is better to use a tape with a higher quantity of adhesive. Care must be taken with reference to removability without residue and working conditions of the self adhesive tape.

Tape Storage

Ideally store tape between 15°C and 25°C with a maximum relative humidity of 65%. Always store away from heat sources, avoiding exposure to light and if possible keep in the original packaging. When temperatures are lower than 15°C it is highly recommended to recondition the adhesive tape to normal temperatures (15°C to 25°C) before use.

Tape Shelf Life

Self-adhesive tapes technical features are generally not permanent but remain at their best for approximately 12 months, if stored according to suggested conditions and by avoiding extreme environmental conditions such as quick and sudden temperature changes, exposure to UV light and high levels of humidity.

All test methods are based on ASTM standards and Pomona's standardised test methods. The information provided above is based on our experience and tape industry knowledge. It is given in good will but is not intended as a guarantee or a warranty. All end users should ensure for themselves that the product is suitable for their own particular application before using.