


# Barrier Tape



*we do tapes better*

0800 766 662

[www.pomona.co.nz](http://www.pomona.co.nz)

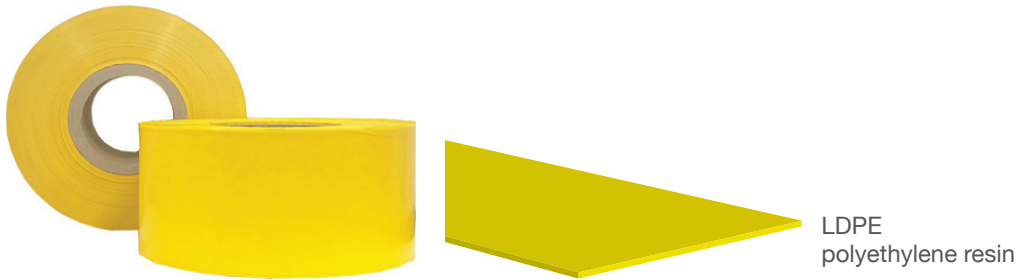

## PRODUCT COMPOSITION

SPECIFICATIONS	
<b>Code</b>	B3100YEL / B3100W / B3100R B3100BLUE / B3100ORG
<b>Description</b>	Barrier Tape
<b>Features and Benefits</b>	Waterproof & humidity resistant Durable
<b>Areas of Use</b>	Ideal for creating a temporary barrier Warning users of hazardous sites
<b>Industries</b>	Construction Trade
<b>Colour</b>	Yellow / White / Red / Blue / Orange
<b>Sizes Available</b>	100mm x 300m = 3 Rolls / Carton
<b>Slitting Options</b>	N/A

PHYSICAL PROPERTIES	
<b>Maximum Tensile Strength (N/25mm)</b>	11 MPa
<b>Puncture Resistance</b>	380 J/m
<b>Total Thickness (mm)</b>	80 micron

The figures above are based off average results from multiple tests, results may vary + or - 5%

**100% New Zealand Owned & Operated**





### **TAPE STORAGE**

Ideally, store tape between 15°C and 25°C with a maximum relative humidity of 65%. Always store away from heat sources, avoiding exposure to light and if possible keep in the original packaging.

### **OTHER INFORMATION**

All test methods are based on ASTM standards and Pomona's standardised test methods. The information provided above is based on our experience and tape industry knowledge. It is given in goodwill but is not a guarantee or a warranty. All end-users should ensure for themselves that the product is suitable for their particular application before using.

NB: Peak Force Test: based on ASTM 3759/D ASTM 3759/M and Pomona® test methods,  
Peel Test: based on ASTM D3330 and Pomona® test methods.

Pomona products are registered and under trademark of PGL and sold exclusively through selected distributors. For further information on Pomona please email [sales@pglgroup.co.nz](mailto:sales@pglgroup.co.nz), phone 0800 766 662 or contact your distributor.

JUNE 2025

**100% New Zealand Owned & Operated**

