


Custom Printed Barrier Tape

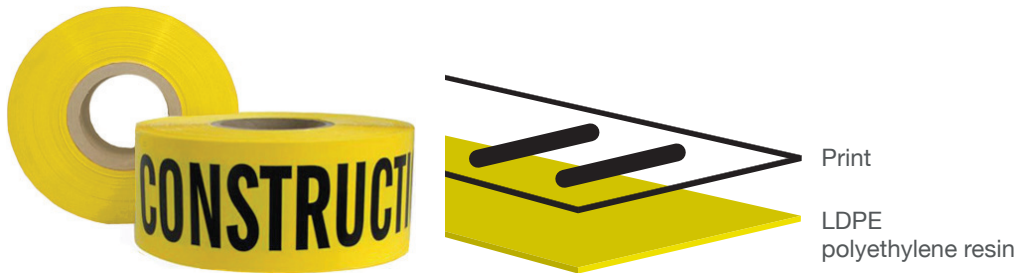

PRODUCT COMPOSITION

SPECIFICATIONS	
Code	B3100
Description	Custom Printed Barrier Tape
Features and Benefits	Bold print Waterproof Durable
Areas of Use	Ideal for creating a temporary barrier Warning users of hazardous sites
Industries	Construction Trade
Colour	Black on Yellow Black on Red Black on White Red on White
Sizes Available	75mm x 300m = 3 Rolls / Carton 100mm x 300m = 3 Rolls / Carton
Slitting Options	N/A

PHYSICAL PROPERTIES	
Maximum Tensile Strength (N/25mm)	11 MPa
Puncture Resistance	380 J/m
Total Thickness (mm)	80 micron



TAPE STORAGE

Ideally, store tape between 15°C and 25°C with a maximum relative humidity of 65%. Always store away from heat sources, avoiding exposure to light and if possible keep in the original packaging.

OTHER INFORMATION

All test methods are based on ASTM standards and Pomona's standardised test methods. The information provided above is based on our experience and tape industry knowledge. It is given in goodwill but is not a guarantee or a warranty. All end-users should ensure for themselves that the product is suitable for their particular application before using.

NB: Peak Force Test: based on ASTM 3759/D ASTM 3759/M and Pomona® test methods,
Peel Test: based on ASTM D3330 and Pomona® test methods.

Pomona products are registered and under trademark of PGL and sold exclusively through selected distributors. For further information on Pomona please email sales@pglgroup.co.nz, phone 0800 766 662 or contact your distributor.

JUNE 2025

100% New Zealand Owned & Operated

